



POWER TRANSMISSION PRODUCTS



TOTAL POWER TRANSMISSION SOLUTIONS

Fenner (India) Limited





Fenner (India) Limited is a member of the JK Organization which ranks among the top Industrial houses in India for over 100 years. The name "Fenner" has been synonymous with Mechanical Power Transmission and Sealing Solutions. Fenner commenced operations in



Patancheru Plant - Hyderabad :
Belts, Oilseals and Moulded Rubber Products

India in 1929 and put up their first manufacturing unit at Madurai in Tamilnadu in the year 1956. Currently there are 7 manufacturing units over 5 locations.



Madurai Plant - Belts & Oil seals

The product lines cover V-Belts, Oil seals, Moulded Rubber Components and Engineering Products for applications in both Industrial and Automotive mechanical power transmissions. The Industrial segment would address major sectors like Steel, Cement, Coal, Sugar, Power, Paper, Textiles, Food processing, Agriculture and many other.



Nilakkottai Plant - Madurai: Speciality Belts



Sriperumbudur Plant - Chennai: Oilseals and
Moulded Rubber Products

Fenner products over several decades have stood for performance, reliability, efficiency and economy. Continuous and collaborative R&D have been the differentiators for Fenner to have emerged as most preferred solution providers by Auto OEMs and the Industrial Sectors.

Fenner has a large net work of Channel Partners in India with countrywide reach. Fenner Exports to more than 50 countries globally. Today Fenner offers truly a Total Solution to Mechanical Power Transmission and Sealing requirements on a single window basis.



Pashamallaram Plant - Hyderabad:
Power Transmission Accessories

Corporate Office :

Fenner (India) Limited
Khivraj Complex - 2, 480 Anna Salai,
Nandanam, Chennai 600 035, India.

Phone : 91 - 44 - 24312450 to 57
Fax : 91 - 44- 24349016, 24320193
Email : export@fennermail.com
Website : www.fennerindia.com






Quality Accreditations



ISO 14001 : MDU



ISO 9001 : MDU

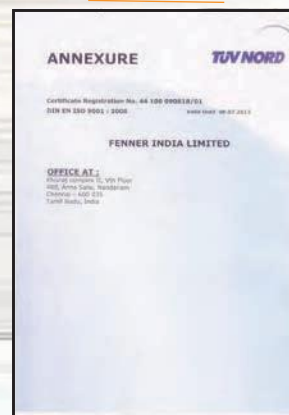

ISO 9001 : MDU



TS16949-MDU



OHSAS-18001 : MDU



TS16949-MDU







Wrapped Belts



Raw Edge Cogged Belts (REC)



No.	Name
1	Cover Fabric
2	Top Fabric
3	Top Cushion Rubber
4	Adhesion Rubber
5	Tension Member
6	Compression Rubber
7	Bottom Fabric
8	Laminate Fabric

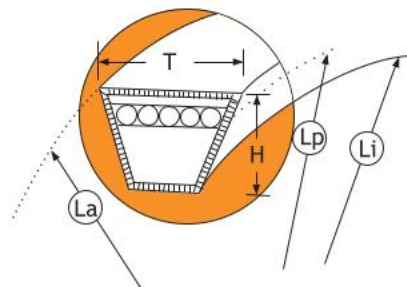

Dimensions

La (Outside Length)
Li (Inside Length)
Lp (Pitch Length)
Le (Effective Length)

T - Top width of belt
H - Height of belt

The length of a line circumscribing the belt along

- its periphery
- its inner circumference.
- its pitch zone.
- the level of the effective diameter of the measuring pulleys whilst the v-belt is at a specified tension.

BELT CROSS REFERENCE - INDUSTRIAL

FIL	ISO	RMA	JIS	DIN	BS
Y	Y	-	-	6	Y
Z	Z	-	M	10	Z
A	A	A	A	13	A
B	B	B	B	17	B
C	C	C	C	22	C
D	D	D	D	32	D
E	E	E	E	40	-
3V	-	3V/9N	3V	-	-
5V	-	5V/15N	5V	-	-
8V	-	8V/25N	8V	-	-
SPZ	SPZ	-	-	SPZ	SPZ
SPA	SPA	-	-	SPA	SPA
SPB	SPB	-	-	SPB	SPB
SPC	SPC	-	-	SPC	SPC
2L	-	2L	-	-	-
3L	-	3L	-	-	-
4L	-	4L	-	-	-
5L	-	5L	-	-	-

ISO : INTERNATIONAL ORGANIZATION FOR STANDARDIZATION
RMA : RUBBER MANUFACTURERS ASSOCIATION, U.S.A.
JIS : JAPANESE INDUSTRIAL STANDARD
DIN : DEUTSCHE INDUSTRIE NORMEN, GERMANY
BS : BRITISH STANDARD, U.K.
FIL : FENNER (INDIA) LIMITED





Classical Section V-Belts
Correas trapeciales de seccion clasica
Keilriemen



Top width 'T' - 3/8", 10 mm
Height 'H' - 7/32", 6 mm

Section Z/10


Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
Z 18	480	19.5
Z 19	510	20.5
Z 20	530	21.5
Z 21	560	22.5
Z 22	580	23.5
Z 23	610	24.5
Z 24	640	25.5
Z 25	660	26.5
Z 26	690	27.5
Z 27	710	28.5
Z 28	740	29.5
Z 29	760	30.5
Z 30	790	31.5
Z 31	810	32.5
Z 32	840	33.5
Z 33	860	34.5
Z 34	890	35.5
Z 35	910	36.5
Z 36	940	37.5
Z 37	970	38.5
Z 38	990	39.5
Z 39	1020	40.5
Z 40	1040	41.5
Z 41	1070	42.5
Z 42	1090	43.5
Z 43	1120	44.5
Z 44	1140	45.5
Z 45	1170	46.5
Z 46	1190	47.5
Z 47	1220	48.5
Z 48	1240	49.5
Z 49	1270	50.5
Z 50	1300	51.5
Z 51	1320	52.5
Z 52	1350	53.5
Z 53	1370	54.5
Z 54	1400	55.5

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
Z 55	1420	56.5
Z 56	1450	57.5
Z 57	1470	58.5
Z 58	1500	59.5
Z 59	1520	60.5
Z 60	1550	61.5
Z 61	1570	62.5
Z 62	1600	63.5
Z 63	1630	64.5
Z 64	1650	65.5
Z 65	1680	66.5
Z 66	1700	67.5
Z 67	1730	68.5
Z 68	1750	69.5
Z 69	1780	70.5
Z 70	1800	71.5
Z 71	1830	72.5
Z 72	1850	73.5
Z 73	1880	74.5
Z 74	1910	75.5
Z 75	1930	76.5
Z 76	1960	77.5
Z 77	1980	78.5
Z 78	2010	79.5
Z 79	2030	80.5
Z 80	2060	81.5
Z 81	2080	82.5
Z 82	2110	83.5
Z 83	2130	84.5
Z 84	2160	85.5
Z 85	2180	86.5

Heat and Oil resistant, Antistatic
Belt Weight: 0.059 kg/m, 0.00330 lbs/inch
Outside lengths are approximate
Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1B, JIS K 6323
Sizes not mentioned in this catalog can be supplied on request



Classical Section V-Belts
Correas trapeciales de seccion clasica
Keilriemen



Top width 'T' - 1/2", 13 mm
Height 'H' - 5/16", 8 mm

Section A/13

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
A 18	490	20
A 19	520	21
A 20	540	22
A 21	570	23
A 22	590	24
A 23	620	25
A 24	640	26
A 25	670	27
A 26	690	28
A 27	720	29
A 28	740	30
A 29	770	31
A 30	800	32
A 31	820	33
A 32	850	34
A 33	870	35
A 34	900	36
A 35	920	37
A 36	950	38
A 37	970	39
A 38	1000	40
A 39	1020	41
A 40	1050	42
A 41	1070	43
A 42	1100	44
A 43	1130	45
A 44	1150	46
A 45	1180	47
A 46	1200	48
A 47	1230	49
A 48	1250	50
A 49	1280	51
A 50	1300	52
A 51	1330	53
A 52	1350	54
A 53	1380	55
A 54	1400	56
A 55	1430	57
A 56	1460	58
A 57	1480	59
A 58	1510	60
A 59	1530	61

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
A 60	1560	62
A 61	1580	63
A 62	1610	64
A 63	1630	65
A 64	1660	66
A 65	1680	67
A 66	1710	68
A 67	1730	69
A 68	1760	70
A 69	1790	71
A 70	1810	72
A 71	1840	73
A 72	1860	74
A 73	1890	75
A 74	1910	76
A 75	1940	77
A 76	1960	78
A 77	1990	79
A 78	2010	80
A 79	2040	81
A 80	2070	82
A 81	2090	83
A 82	2120	84
A 83	2140	85
A 84	2170	86
A 85	2190	87
A 86	2220	88
A 87	2240	89
A 88	2270	90
A 89	2290	91
A 90	2320	92
A 91	2340	93
A 92	2370	94
A 93	2400	95
A 94	2420	96
A 95	2450	97
A 96	2470	98
A 97	2500	99
A 98	2520	100
A 100	2570	102
A 103	2650	105
A 105	2700	107


Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
A 110	2830	112
A 112	2880	114
A 115	2950	117
A 116	2980	118
A 118	3030	120
A 120	3080	122
A 124	3180	126
A 125	3210	127
A 128	3280	130
A 130	3340	132
A 133	3410	135
A 134	3440	136
A 136	3490	138
A 140	3590	142
A 144	3690	146
A 158	4050	160
A 160	4100	162
A 162	4150	164
A 168	4300	170
A 173	4430	175
A 180	4610	182

Heat and Oil resistant, Antistatic
Belt Weight: 0.108 kg/m, 0.00604 lbs/inch
Outside lengths are approximate
Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1B, JIS K 6323
Sizes not mentioned in this catalog can be supplied on request





Classical Section V-Belts
Correas trapeziales de seccion clasica
Keilriemen



Top width 'T' - 21/32", 17 mm
Height 'H' - 7/16", 11 mm

Section B/17

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
B 20	550	23
B 21	580	24
B 22	600	25
B 23	630	26
B 24	650	27
B 25	680	28
B 26	700	29
B 27	730	30
B 28	750	31
B 29	780	32
B 30	810	33
B 31	830	34
B 32	860	35
B 33	880	36
B 34	910	37
B 35	930	38
B 36	960	39
B 37	980	40
B 38	1010	41
B 39	1030	42
B 40	1060	43
B 41	1080	44
B 42	1110	45
B 43	1140	46
B 44	1160	47
B 45	1190	48
B 46	1210	49
B 47	1240	50
B 48	1260	51
B 49	1290	52
B 50	1310	53
B 51	1340	54
B 52	1360	55
B 53	1390	56
B 54	1410	57
B 55	1440	58
B 56	1470	59
B 57	1490	60
B 58	1520	61
B 59	1540	62
B 60	1570	63
B 61	1590	64
B 62	1620	65

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
B 63	1640	66
B 64	1670	67
B 65	1690	68
B 66	1720	69
B 67	1740	70
B 68	1770	71
B 69	1800	72
B 70	1820	73
B 71	1850	74
B 72	1870	75
B 73	1900	76
B 74	1920	77
B 75	1950	78
B 76	1970	79
B 77	2000	80
B 78	2020	81
B 79	2050	82
B 80	2080	83
B 81	2100	84
B 82	2130	85
B 83	2150	86
B 84	2180	87
B 85	2200	88
B 86	2230	89
B 87	2250	90
B 88	2280	91
B 89	2300	92
B 90	2330	93
B 91	2350	94
B 92	2380	95
B 93	2410	96
B 94	2430	97
B 95	2460	98
B 96	2480	99
B 97	2510	100
B 98	2530	101
B 99	2560	102
B 100	2580	103
B 102	2630	105
B 103	2660	106
B 104	2680	107
B 105	2710	108
B 106	2740	109


Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
B 108	2790	111
B 110	2840	113
B 112	2890	115
B 114	2940	117
B 115	2960	118
B 116	2990	119
B 118	3040	121
B 120	3090	123
B 121	3110	124
B 122	3140	125
B 124	3190	127
B 126	3240	129
B 128	3290	131
B 130	3350	133
B 133	3420	136
B 136	3500	139
B 138	3550	141
B 140	3600	143
B 142	3650	145
B 144	3700	147
B 146	3750	149
B 148	3800	151
B 150	3850	153
B 152	3900	155
B 154	3950	157
B 158	4060	161
B 162	4160	165
B 166	4260	169
B 173	4440	176
B 180	4620	183
B 188	4820	191
B 190	4870	193
B 195	5000	198
B 205	5250	208
B 210	5380	213
B 225	5760	228
B 240	6140	243
B 255	6520	258
B 270	6900	273
B 285	7280	288
B 300	7660	303
B 315	8040	318

'B' Sec range upto 570 inches

Heat and Oil resistant, Antistatic
Belt Weight: 0.182 kg/m, 0.01019 lbs/inch
Outside lengths are approximate
Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1B, JIS K 6323
Sizes not mentioned in this catalog can be supplied on request



Classical Section V-Belts
Correas trapeziales de seccion clasica
Keilriemen



Top width 'T' -7/8", 22 mm
Height 'H' -17/32", 14 mm

Section C/22

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
C 36	970	40
C 37	1000	41
C 38	1020	42
C 39	1050	43
C 40	1070	44
C 41	1100	45
C 42	1120	46
C 43	1150	47
C 44	1170	48
C 45	1200	49
C 46	1220	50
C 47	1250	51
C 48	1280	52
C 50	1330	54
C 51	1350	55
C 53	1400	57
C 54	1430	58
C 55	1450	59
C 57	1500	61
C 60	1580	64
C 62	1630	66
C 63	1660	67
C 65	1710	69
C 67	1760	71
C 68	1780	72
C 69	1810	73
C 70	1830	74
C 71	1860	75
C 72	1880	76
C 73	1910	77
C 75	1960	79
C 76	1990	80
C 78	2040	82
C 80	2090	84
C 81	2110	85
C 83	2160	87
C 84	2190	88
C 85	2220	89
C 87	2270	91
C 90	2340	94
C 92	2390	96
C 93	2420	97

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
C 95	2470	99
C 96	2490	100
C 97	2520	101
C 99	2570	103
C 100	2600	104
C 101	2620	105
C 103	2670	107
C 105	2720	109
C 106	2750	110
C 107	2770	111
C 108	2800	112
C 109	2820	113
C 110	2850	114
C 111	2880	115
C 112	2900	116
C 115	2980	119
C 116	3000	120
C 118	3050	122
C 120	3100	124
C 122	3150	126
C 124	3210	128
C 126	3260	130
C 128	3310	132
C 130	3360	134
C 136	3510	140
C 140	3610	144
C 144	3710	148
C 148	3820	152
C 150	3870	154
C 152	3920	156
C 156	4020	160
C 158	4070	162
C 162	4170	166
C 170	4370	174
C 173	4450	177
C 180	4630	184
C 185	4760	189
C 190	4880	194
C 195	5010	199
C 210	5390	214
C 225	5770	229
C 238	6100	242

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
C 240	6150	244
C 255	6530	259
C 268	6860	272
C 270	6910	274
C 285	7300	289
C 298	7630	302
C 300	7680	304
C 315	8060	319
C 328	8390	332
C 330	8440	334
C 345	8820	349
C 358	9150	362
C 360	9200	364
C 390	9960	394
C 418	10670	422
C 420	10720	424


'C' Sec range upto 585 inches

Heat and Oil resistant, Antistatic
Belt Weight: 0.299 kg/m, 0.01674 lbs/inch
Outside lengths are approximate
Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1B, JIS K 6323
Sizes not mentioned in this catalog can be supplied on request





Classical Section V-Belts
Correas trapeziales de seccion clasica
Keilriemen



Section	D	E
Top width 'T'	1 1/4", 32mm	1 1/2", 38mm
Height 'H'	3/4", 19mm	29/32", 23mm

Section D/32

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
D 75	1990	80
D 88	2320	93
D 90	2370	95
D 95	2500	100
D 105	2750	110
D 112	2930	117
D 120	3130	125
D 128	3330	133
D 136	3540	141
D 144	3740	149
D 158	4100	163
D 162	4200	167
D 173	4480	178
D 180	4660	185
D 195	5040	200
D 204	5260	209
D 210	5420	215
D 225	5800	230
D 238	6130	243
D 240	6180	245
D 255	6560	260
D 268	6890	273
D 270	6940	275
D 285	7320	290
D 298	7650	303
D 300	7700	305
D 314	8060	319
D 315	8080	320
D 328	8410	333
D 330	8470	335
D 345	8850	350
D 358	9180	363
D 360	9230	365
D 390	9990	395
D 418	10700	423
D 420	10750	425
D 450	11510	455


Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
D 478	12220	483
D 480	12280	485
D 538	13750	543
D 540	13800	545
D 598	15270	603
D 600	15320	605

Section E/38

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
E 180	4670	186
E 195	5050	201
E 210	5430	216
E 238	6140	244
E 240	6190	246
E 268	6900	274
E 270	6950	276
E 298	7660	304
E 300	7720	306
E 328	8430	334
E 330	8480	336
E 358	9190	364
E 360	9240	366
E 390	10000	396
E 394	10100	400
E 418	10710	424
E 420	10760	426
E 478	12240	484
E 480	12290	486
E 538	13760	544
E 540	13810	546
E 598	15280	604

Heat and Oil resistant, Antistatic
Belt Weight D: 0.608 kg/m, 0.03403 lbs/inch
Belt Weight E: 0.907 kg/m, 0.05076 lbs/inch
Outside lengths are approximate
Standards: DIN 2215, RMA IP 20, ISO 4184, BS 3790, API 1B, JIS K 6323
Sizes not mentioned in this catalog can be supplied on request

Fractional Horse Power Belts
Correas trapeziales de seccion clasica
Keilriemen



Section	3L	4L
Top width 'T'	3/8	1/2"
Height 'H'	7/32	5/16"

Section 3L

Size Ref.	Outside Length in inches (La)	Size Ref.	Outside Length in inches (La)
3L180	18	3L600	60
3L190	19	3L610	61
3L200	20	3L620	62
3L210	21	3L630	63
3L220	22	3L640	64
3L230	23	3L650	65
3L240	24	3L660	66
3L250	25	3L670	67
3L260	26	3L680	68
3L270	27	3L690	69
3L280	28	3L700	70
3L290	29	3L710	71
3L300	30	3L720	72
3L310	31	3L730	73
3L320	32	3L740	74
3L330	33	3L750	75
3L340	34		
3L350	35		
3L360	36		
3L370	37		
3L380	38		
3L390	39		
3L400	40		
3L410	41		
3L420	42		
3L430	43		
3L440	44		
3L450	45		
3L460	46		
3L470	47		
3L480	48		
3L490	49		
3L500	50		
3L510	51		
3L520	52		
3L530	53		
3L540	54		
3L550	55		
3L560	56		
3L570	57		
3L580	58		
3L590	59		

Section 4L

Size Ref.	Outside Length in inches (La)		Size Ref.	Outside Length in inches (La)		Size Ref.	Outside Length in inches (La)
4L180	18.0		4L475	47.5		4L890	89.0
4L188	18.8		4L480	48.0		4L900	90.0
4L190	19.0		4L490	49.0		4L910	91.0
4L200	20.0		4L500	50.0		4L920	92.0
4L210	21.0		4L510	51.0		4L930	93.0
4L215	21.5		4L520	52.0		4L940	94.0
4L220	22.0		4L530	53.0		4L950	95.0
4L230	23.0		4L540	54.0		4L960	96.0
4L240	24.0		4L550	55.0		4L970	97.0
4L250	25.0		4L560	56.0		4L980	98.0
4L255	25.5		4L570	57.0		4L990	99.0
4L260	26.0		4L580	58.0		4L1000	100.0
4L270	27.0		4L590	59.0			
4L275	27.5		4L600	60.0			
4L280	28.0		4L610	61.0			
4L285	28.5		4L620	62.0			
4L290	29.0		4L630	63.0			
4L295	29.5		4L640	64.0			
4L300	30.0		4L650	65.0			
4L310	31.0		4L660	66.0			
4L318	31.8		4L670	67.0			
4L320	32.0		4L680	68.0			
4L328	32.8		4L690	69.0			
4L330	33.0		4L700	70.0			
4L333	33.3		4L710	71.0			
4L338	33.8		4L720	72.0			
4L340	34.0		4L730	73.0			
4L346	34.6		4L740	74.0			
4L350	35.0		4L750	75.0			
4L360	36.0		4L760	76.0			
4L370	37.0		4L770	77.0			
4L380	38.0		4L780	78.0			
4L390	39.0		4L790	79.0			
4L400	40.0		4L800	80.0			
4L405	40.5		4L810	81.0			
4L410	41.0		4L820	82.0			
4L420	42.0		4L830	83.0			
4L430	43.0		4L840	84.0			
4L440	44.0		4L850	85.0			
4L450	45.0		4L860	86.0			
4L460	46.0		4L870	87.0			
4L470	47.0		4L880	88.0			

Heat and Oil resistant, Antistatic

Belt Weight 3L: 0.059 kg/m, 0.00330 lbs/inch

Belt Weight 4L: 0.108 kg/m, 0.00604 lbs/inch

Standards: RMA IP 23


Sizes not mentioned in this catalog can be supplied on request



3L, 4L Section Belts



Fractional Horse Power Belts
Correas trapeciales de seccion clasica
Keilriemen



Top width 'T' - 2 1/32"
Height 'H' - 3/8"

Section 5L

Size Ref.	Outside Length in inches (La)	Size Ref.	Outside Length in inches (La)
5L230	23.0	5L630	63.0
5L240	24.0	5L640	64.0
5L250	25.0	5L650	65.0
5L260	26.0	5L660	66.0
5L265	26.5	5L670	67.0
5L270	27.0	5L680	68.0
5L280	28.0	5L690	69.0
5L290	29.0	5L700	70.0
5L300	30.0	5L710	71.0
5L310	31.0	5L720	72.0
5L320	32.0	5L730	73.0
5L330	33.0	5L740	74.0
5L340	34.0	5L750	75.0
5L350	35.0	5L760	76.0
5L355	35.5	5L770	77.0
5L360	36.0	5L780	78.0
5L370	37.0	5L790	79.0
5L380	38.0	5L800	80.0
5L390	39.0	5L810	81.0
5L400	40.0	5L820	82.0
5L410	41.0	5L830	83.0
5L420	42.0	5L840	84.0
5L430	43.0	5L850	85.0
5L440	44.0	5L860	86.0
5L450	45.0	5L870	87.0
5L460	46.0	5L880	88.0
5L470	47.0	5L890	89.0
5L480	48.0	5L900	90.0
5L490	49.0	5L910	91.0
5L500	50.0	5L920	92.0
5L510	51.0	5L930	93.0
5L520	52.0	5L940	94.0
5L530	53.0	5L950	95.0
5L540	54.0	5L960	96.0
5L550	55.0	5L970	97.0
5L560	56.0	5L980	98.0
5L570	57.0	5L990	99.0
5L580	58.0	5L1000	100.0
5L590	59.0		
5L600	60.0		
5L610	61.0		
5L620	62.0		

Heat and Oil resistant, Antistatic
Belt Weight: 0.182 kg/m, 0.01019 lbs/inch
Standards: RMA IP 23
Sizes not mentioned in this catalog can be supplied on request

Narrow V-Belts
Correas trapeziales
Endlose Hochleistungs-Schmalkeilriemen



Section	3V	5V	8V
Top width 'T'	3/8"	5/8"	1"
Height 'H'	21/64"	35/64"	7/8"

Section 3V

Size Ref.	Outside Length in inches (La)
3V250	25.0
3V265	26.5
3V280	28.0
3V300	30.0
3V315	31.5
3V335	33.5
3V355	35.5
3V375	37.5
3V400	40.0
3V425	42.5
3V450	45.0
3V475	47.5
3V500	50.0
3V530	53.0
3V560	56.0
3V600	60.0
3V630	63.0
3V670	67.0
3V710	71.0
3V750	75.0
3V800	80.0
3V850	85.0
3V900	90.0
3V950	95.0
3V1000	100.0
3V1060	106.0
3V1120	112.0
3V1180	118.0
3V1250	125.0
3V1320	132.0
3V1400	140.0

Section 5V

Size Ref.	Outside Length in inches (La)
5V500	50.0
5V560	56.0
5V600	60.0
5V630	63.0
5V670	67.0
5V710	71.0
5V750	75.0
5V800	80.0
5V850	85.0
5V900	90.0
5V950	95.0
5V1000	100.0
5V1060	106.0
5V1120	112.0
5V1180	118.0
5V1250	125.0
5V1320	132.0
5V1500	150.0
5V1600	160.0
5V1700	170.0
5V1800	180.0
5V1900	190.0
5V2000	200.0
5V2120	212.0
5V2240	224.0
5V2360	236.0
5V2500	250.0
5V2650	265.0
5V2800	280.0
5V3000	300.0
5V3150	315.0
5V3350	335.0
5V3550	355.0

'5V' Range
upto 570 inches

Section 8V

Size Ref.	Outside Length in inches (La)
8V1000	100.0
8V1120	112.0
8V1180	118.0
8V1250	125.0
8V1320	132.0
8V1400	140.0
8V1500	150.0
8V1600	160.0
8V1700	170.0
8V1800	180.0
8V1900	190.0
8V2000	200.0
8V2120	212.0
8V2240	224.0
8V2360	236.0
8V2500	250.0
8V2650	265.0
8V2800	280.0
8V3000	300.0
8V3150	315.0
8V3350	335.0
8V3550	355.0
8V3750	375.0
8V4000	400.0
8V4250	425.0
8V4500	450.0
8V4750	475.0
8V5000	500.0
8V5600	560.0

Narrow V - 3L, 8V Section Belts

Heat and Oil resistant, Antistatic

Belt Weight-3V: 0.079 kg/m, 0.00442 lbs/inch

Belt Weight-5V: 0.181 kg/m, 0.01013 lbs/inch

Belt Weight-8V: 0.561 kg/m, 0.03140 lbs/inch


Standards: RMA IP 22, API 1B

Sizes not mentioned in this catalog can be supplied on request





Metric Wedge Belts
Correas trapeziales estrechas
Endlose Hochleistungs-Schmalkeilriemen



Top width 'T' - 10 mm
Height 'H' - 8 mm

Section SPZ

Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPZ604	604	SPZ1112	1112	SPZ1637	1637	SPZ3000	3000
SPZ612	612	SPZ1120	1120	SPZ1650	1650	SPZ3150	3150
SPZ630	630	SPZ1137	1137	SPZ1662	1662	SPZ3350	3350
SPZ637	637	SPZ1140	1140	SPZ1687	1687	SPZ3550	3550
SPZ640	640	SPZ1150	1150	SPZ1700	1700		
SPZ660	660	SPZ1162	1162	SPZ1712	1712		
SPZ672	672	SPZ1180	1180	SPZ1737	1737		
SPZ680	680	SPZ1187	1187	SPZ1750	1750		
SPZ682	682	SPZ1202	1202	SPZ1762	1762		
SPZ710	710	SPZ1210	1210	SPZ1787	1787		
SPZ722	722	SPZ1212	1212	SPZ1800	1800		
SPZ730	730	SPZ1227	1227	SPZ1812	1812		
SPZ737	737	SPZ1237	1237	SPZ1837	1837		
SPZ750	750	SPZ1250	1250	SPZ1850	1850		
SPZ758	758	SPZ1262	1262	SPZ1862	1862		
SPZ762	762	SPZ1270	1270	SPZ1887	1887		
SPZ787	787	SPZ1287	1287	SPZ1900	1900		
SPZ800	800	SPZ1312	1312	SPZ1937	1937		
SPZ812	812	SPZ1320	1320	SPZ1950	1950		
SPZ825	825	SPZ1337	1337	SPZ1962	1962		
SPZ837	837	SPZ1340	1340	SPZ1987	1987		
SPZ850	850	SPZ1362	1362	SPZ2000	2000		
SPZ862	862	SPZ1387	1387	SPZ2030	2030		
SPZ875	875	SPZ1400	1400	SPZ2037	2037		
SPZ887	887	SPZ1412	1412	SPZ2062	2062		
SPZ900	900	SPZ1420	1420	SPZ2087	2087		
SPZ912	912	SPZ1430	1430	SPZ2120	2120		
SPZ925	925	SPZ1437	1437	SPZ2137	2137		
SPZ937	937	SPZ1450	1450	SPZ2187	2187		
SPZ950	950	SPZ1462	1462	SPZ2240	2240		
SPZ962	962	SPZ1470	1470	SPZ2280	2280		
SPZ987	987	SPZ1487	1487	SPZ2287	2287		
SPZ1000	1000	SPZ1500	1500	SPZ2300	2300		
SPZ1010	1010	SPZ1512	1512	SPZ2360	2360		
SPZ1012	1012	SPZ1520	1520	SPZ2410	2410		
SPZ1024	1024	SPZ1527	1527	SPZ2437	2437		
SPZ1037	1037	SPZ1537	1537	SPZ2487	2487		
SPZ1047	1047	SPZ1560	1560	SPZ2500	2500		
SPZ1060	1060	SPZ1562	1562	SPZ2540	2540		
SPZ1077	1077	SPZ1587	1587	SPZ2650	2650		
SPZ1080	1080	SPZ1600	1600	SPZ2800	2800		
SPZ1087	1087	SPZ1612	1612	SPZ2840	2840		

'SPZ' range
upto 4000 mm

Heat and Oil resistant, Antistatic
Belt Weight: 0.079 kg/m, 0.00442 lbs/inch
Standards: DIN 7753, ISO 4184, BS 3790
Sizes not mentioned in this catalog can be supplied on request



Metric Wedge Belts
Correas trapeciales estrechas
Endlose Hochleistungs-Schmalkeilriemen



Top width 'T' - 13 mm
Height 'H' - 10 mm

Section SPA


Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPA630	630	SPA1360	1360	SPA1932	1932	SPA3550	3550
SPA670	670	SPA1375	1375	SPA1950	1950	SPA3750	3750
SPA730	730	SPA1382	1382	SPA1982	1982	SPA4000	4000
SPA732	732	SPA1400	1400	SPA2000	2000	SPA4250	4250
SPA750	750	SPA1407	1407	SPA2032	2032	SPA4500	4500
SPA760	760	SPA1425	1425	SPA2057	2057		
SPA762	762	SPA1430	1430	SPA2082	2082		
SPA772	772	SPA1432	1432	SPA2120	2120		
SPA782	782	SPA1450	1450	SPA2132	2132		
SPA800	800	SPA1457	1457	SPA2182	2182		
SPA820	820	SPA1482	1482	SPA2207	2207		
SPA832	832	SPA1500	1500	SPA2227	2227		
SPA850	850	SPA1507	1507	SPA2232	2232		
SPA900	900	SPA1525	1525	SPA2240	2240		
SPA910	910	SPA1532	1532	SPA2282	2282		
SPA922	922	SPA1550	1550	SPA2300	2300		
SPA932	932	SPA1557	1557	SPA2307	2307		
SPA950	950	SPA1582	1582	SPA2332	2332		
SPA967	967	SPA1600	1600	SPA2360	2360		
SPA982	982	SPA1607	1607	SPA2382	2382		
SPA1000	1000	SPA1630	1630	SPA2432	2432		
SPA1032	1032	SPA1632	1632	SPA2482	2482		
SPA1060	1060	SPA1650	1650	SPA2500	2500		
SPA1082	1082	SPA1657	1657	SPA2532	2532		
SPA1107	1107	SPA1662	1662	SPA2582	2582		
SPA1120	1120	SPA1675	1675	SPA2607	2607		
SPA1132	1132	SPA1680	1680	SPA2650	2650		
SPA1150	1150	SPA1682	1682	SPA2682	2682		
SPA1157	1157	SPA1700	1700	SPA2732	2732		
SPA1180	1180	SPA1707	1707	SPA2782	2782		
SPA1207	1207	SPA1732	1732	SPA2800	2800		
SPA1232	1232	SPA1750	1750	SPA2832	2832		
SPA1250	1250	SPA1757	1757	SPA2882	2882		
SPA1257	1257	SPA1782	1782	SPA2982	2982		
SPA1272	1272	SPA1800	1800	SPA3000	3000		
SPA1282	1282	SPA1807	1807	SPA3070	3070		
SPA1300	1300	SPA1832	1832	SPA3082	3082		
SPA1307	1307	SPA1850	1850	SPA3150	3150		
SPA1320	1320	SPA1857	1857	SPA3182	3182		
SPA1332	1332	SPA1882	1882	SPA3282	3282		
SPA1340	1340	SPA1900	1900	SPA3350	3350		
SPA1357	1357	SPA1907	1907	SPA3482	3482		

Heat and Oil resistant, Antistatic
Belt Weight: 0.125 kg/m, 0.00700 lbs/inch
Standards: DIN 7753, ISO 4184, BS 3790
Sizes not mentioned in this catalog can be supplied on request





Metric Wedge Belts
Correas trapeciales estrechas
Endlose Hochleistungs-Schmalkeilriemen



Section	SPB	SPC
Top width 'T'	17mm	22mm
Height 'H'	13mm	18mm

Section SPB

Size Ref.	Pitch Length in mm (Lp)
SPB1250	1250
SPB1260	1260
SPB1320	1320
SPB1340	1340
SPB1400	1400
SPB1410	1410
SPB1450	1450
SPB1500	1500
SPB1510	1510
SPB1590	1590
SPB1600	1600
SPB1627	1627
SPB1690	1690
SPB1700	1700
SPB1800	1800
SPB1900	1900
SPB2000	2000
SPB2020	2020
SPB2098	2098
SPB2120	2120
SPB2150	2150
SPB2180	2180
SPB2240	2240
SPB2280	2280
SPB2300	2300
SPB2360	2360
SPB2361	2361
SPB2410	2410
SPB2500	2500
SPB2530	2530
SPB2650	2650
SPB2680	2680
SPB2800	2800
SPB2990	2990
SPB3000	3000
SPB3150	3150
SPB3350	3350
SPB3550	3550
SPB3750	3750
SPB3800	3800
SPB4000	4000
SPB4250	4250

Size Ref.	Pitch Length in mm (Lp)
SPB4500	4500
SPB4750	4750
SPB5000	5000
SPB5300	5300
SPB5600	5600
SPB6000	6000
SPB6300	6300
SPB6700	6700
SPB7100	7100
SPB8000	8000

'SPB' range
upto 14500 mm


Section SPC

Size Ref.	Pitch Length in mm (Lp)
SPC1800	1800
SPC2000	2000
SPC2120	2120
SPC2240	2240
SPC2360	2360
SPC2500	2500
SPC2650	2650
SPC2800	2800
SPC3000	3000
SPC3150	3150
SPC3350	3350
SPC3550	3550
SPC3750	3750
SPC4000	4000
SPC4250	4250
SPC4500	4500
SPC4750	4750
SPC5000	5000
SPC5300	5300
SPC5600	5600
SPC6000	6000
SPC6300	6300
SPC6700	6700
SPC7100	7100
SPC7500	7500
SPC8000	8000
SPC8500	8500
SPC9000	9000
SPC10000	10000
SPC10600	10600

'SPC' range
upto 14500 mm

Heat and Oil resistant, Antistatic
Belt Weight SPB / 17N : 0.181 kg/m, 0.01013 lbs/inch
Belt Weight SPC / 22 N : 0.348 kg/m, 0.01948 lbs/inch
Standards: DIN 7753, ISO 4184, BS 3790
Sizes not mentioned in this catalog can be supplied on request

Cogged Classical V Belts
 Courreas trapeciales - de flancos abiertos, dentadas
 Keilriemen flankenoffen, formgezahnt



Top width 'T' - 1/2", 13 mm
 Height 'H' - 5/16", 8 mm

Section AX

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
AX18	490	20
AX19	520	21
AX20	540	22
AX21	570	23
AX22	590	24
AX23	620	25
AX24	640	26
AX25	670	27
AX26	690	28
AX27	720	29
AX28	740	30
AX29	770	31
AX30	800	32
AX31	820	33
AX32	850	34
AX33	870	35
AX34	900	36
AX35	920	37
AX36	950	38
AX37	970	39
AX38	1000	40
AX39	1020	41
AX40	1050	42
AX41	1070	43
AX42	1100	44
AX43	1130	45
AX44	1150	46
AX45	1180	47
AX46	1200	48
AX47	1230	49
AX48	1250	50
AX49	1280	51
AX50	1300	52
AX51	1330	53
AX52	1350	54
AX53	1380	55
AX54	1400	56
AX55	1430	57
AX56	1460	58
AX57	1480	59
AX58	1510	60
AX59	1530	61

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
AX60	1560	62
AX61	1580	63
AX62	1610	64
AX63	1630	65
AX64	1660	66
AX65	1680	67
AX66	1710	68
AX67	1730	69
AX68	1760	70
AX69	1790	71
AX70	1810	72
AX71	1840	73
AX72	1860	74
AX73	1890	75
AX74	1910	76
AX75	1940	77
AX76	1960	78
AX77	1990	79
AX78	2010	80
AX79	2040	81
AX80	2070	82
AX81	2090	83
AX82	2120	84
AX83	2140	85
AX84	2170	86
AX85	2190	87
AX86	2220	88
AX87	2240	89
AX88	2270	90
AX90	2320	92
AX91	2340	93
AX92	2370	94
AX93	2400	95
AX94	2420	96
AX95	2450	97
AX96	2470	98
AX97	2500	99
AX98	2520	100
AX100	2570	102
AX103	2650	105
AX105	2700	107
AX110	2830	112

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
AX112	2880	114
AX115	2950	117
AX120	3080	122
AX125	3210	127
AX128	3280	130
AX144	3690	146
AX150	3840	152
AX158	4050	160
AX173	4430	175

'AX' range upto 190 Inches

Cogged Classical - AX Section Belts




Heat and Oil resistant, Antistatic
 Belt Weight: 0.102 kg/m, 0.00571 lbs/inch
 Standards: DIN 7753, RMA IP 20, BS 3790, API 1B

Sizes not mentioned in this catalog can be supplied on request



Cogged Classical V Belts
Courroas trapeziales - de flancos abiertos, dentadas
Keilriemen flankenoffen, formgezahnt



Top width 'T' - 21/32", 17 mm
Height 'H' - 13/32", 11 mm

Section BX

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
BX 28	750	31
BX 29	780	32
BX 30	810	33
BX 31	830	34
BX 33	880	36
BX 34	910	37
BX 35	930	38
BX 38	1010	41
BX 39	1030	42
BX 40	1060	43
BX 41	1080	44
BX 42	1110	45
BX 44	1160	47
BX 45	1190	48
BX 46	1210	49
BX 47	1240	50
BX 48	1260	51
BX 49	1290	52
BX 50	1310	53
BX 51	1340	54
BX 52	1360	55
BX 53	1390	56
BX 54	1410	57
BX 55	1440	58
BX 56	1470	59
BX 58	1520	61
BX 59	1540	62
BX 60	1570	63
BX 61	1590	64
BX 62	1620	65
BX 63	1640	66
BX 64	1670	67
BX 65	1690	68
BX 66	1720	69
BX 67	1740	70

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
BX 68	1770	71
BX 69	1800	72
BX 70	1820	73
BX 71	1850	74
BX 72	1870	75
BX 73	1900	76
BX 74	1920	77
BX 75	1950	78
BX 76	1970	79
BX 77	2000	80
BX 78	2020	81
BX 79	2050	82
BX 80	2080	83
BX 81	2100	84
BX 82	2130	85
BX 83	2150	86
BX 84	2180	87
BX 85	2200	88
BX 86	2230	89
BX 87	2250	90
BX 88	2280	91
BX 89	2300	92
BX 90	2330	93
BX 91	2350	94
BX 92	2380	95
BX 93	2410	96
BX 94	2430	97
BX 95	2460	98
BX 96	2480	99
BX 97	2510	100
BX 98	2530	101
BX 99	2560	102
BX 100	2580	103
BX 101	2610	104
BX 102	2630	105
BX 103	2660	106
BX 104	2680	107
BX 105	2710	108

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
BX 106	2740	109
BX 108	2790	111
BX 110	2840	113
BX 112	2890	115
BX 114	2940	117
BX 115	2960	118
BX 116	2990	119
BX 118	3040	121
BX 120	3090	123
BX 122	3140	125
BX 124	3190	127
BX 125	3220	128
BX 126	3240	129
BX 128	3290	131
BX 130	3350	133
BX 132	3400	135
BX 133	3420	136
BX 136	3500	139
BX 138	3550	141
BX 140	3600	143
BX 142	3650	145
BX 144	3700	147
BX 146	3750	149
BX 148	3800	151
BX 150	3850	153
BX 152	3900	155
BX 154	3950	157
BX 158	4060	161
BX 162	4160	165
BX 166	4260	169
BX 170	4360	173
BX 173	4440	176
BX 180	4620	183
BX 188	4820	191
BX 195	5000	198

Heat and Oil resistant, Antistatic
Belt Weight: 0.163 kg/m, 0.00912 lbs/inch
Standards: DIN 7753, RMA IP 20, BS 3790, API 1B

Sizes not mentioned in this catalog can be supplied on request



Cogged Classical V Belts
Courroas trapeziales - de flancos abiertos, dentadas
Keilriemen flankenoffen, formgezahnt



Top width 'T' -7/8", 22 mm
Height 'H' -17/32", 14 mm

Section CX

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
CX28	770	32
CX33	890	37
CX34	920	38
CX35	950	39
CX38	1020	42
CX39	1050	43
CX40	1070	44
CX41	1100	45
CX42	1120	46
CX43	1150	47
CX44	1170	48
CX45	1200	49
CX46	1220	50
CX47	1250	51
CX48	1280	52
CX49	1300	53
CX50	1330	54
CX51	1350	55
CX52	1380	56
CX53	1400	57
CX54	1430	58
CX55	1450	59
CX56	1480	60
CX58	1530	62
CX59	1550	63
CX60	1580	64
CX61	1610	65
CX62	1630	66
CX63	1660	67
CX64	1680	68
CX65	1710	69
CX66	1730	70
CX67	1760	71
CX68	1780	72
CX69	1810	73
CX70	1830	74
CX71	1860	75
CX72	1880	76

Size Ref.	Pitch Length in mm (Lp)	Outside Length in inches (La)
CX73	1910	77
CX74	1940	78
CX75	1960	79
CX76	1990	80
CX77	2010	81
CX78	2040	82
CX79	2060	83
CX80	2090	84
CX81	2110	85
CX82	2140	86
CX83	2160	87
CX84	2190	88
CX85	2220	89
CX86	2240	90
CX87	2270	91
CX88	2290	92
CX89	2320	93
CX90	2340	94
CX96	2490	100
CX100	2600	104
CX101	2620	105
CX105	2720	109
CX106	2750	110
CX109	2820	113
CX112	2900	116
CX115	2980	119
CX118	3050	122
CX120	3100	124
CX123	3180	127
CX128	3310	132
CX133	3430	137
CX136	3510	140
CX144	3710	148
CX150	3870	154
CX158	4070	162
CX162	4170	166
CX173	4450	177
CX180	4630	184
CX187	4810	191
CX190	4880	194
CX195	5010	199


Heat and Oil resistant, Antistatic
Belt Weight: 0.289 kg/m, 0.01618 lbs/inch
Standards: DIN 7753, RMA IP 20, BS 3790, API 1B

Sizes not mentioned in this catalog can be supplied on request





Cogged Narrow V Belts
Courreas trapeziales - de flancos abiertos, dentadas
Keilriemen flankenoffen, formgezahnt



Section	3VX	5VX
Top width 'T'	3/8"	5/8"
Height 'H'	21/64"	35/64"

Section 3VX

Size Ref.	Outside Length in inches (La)
3VX 250	25.0
3VX 280	28.0
3VX 300	30.0
3VX 315	31.5
3VX 335	33.5
3VX 355	35.5
3VX 375	37.5
3VX 400	40.0
3VX 425	42.5
3VX 450	45.0
3VX 475	47.5
3VX 500	50.0
3VX 530	53.0
3VX 560	56.0
3VX 600	60.0
3VX 630	63.0
3VX 670	67.0
3VX 710	71.0
3VX 750	75.0
3VX 800	80.0
3VX 850	85.0
3VX 900	90.0
3VX 950	95.0
3VX 1000	100.0
3VX 1060	106.0
3VX 1120	112.0
3VX 1180	118.0
3VX 1250	125.0
3VX 1320	132.0
3VX 1400	140.0

'3VX' range
upto 190 inches

Section 5VX

Size Ref.	Outside Length in inches (La)
5VX 450	45.0
5VX 490	49.0
5VX 500	50.0
5VX 510	51.0
5VX 530	53.0
5VX 540	54.0
5VX 550	55.0
5VX 560	56.0
5VX 570	57.0
5VX 580	58.0
5VX 590	59.0
5VX 600	60.0
5VX 610	61.0
5VX 630	63.0
5VX 650	65.0
5VX 660	66.0
5VX 670	67.0
5VX 680	68.0
5VX 690	69.0
5VX 710	71.0
5VX 730	73.0
5VX 740	74.0
5VX 750	75.0
5VX 780	78.0
5VX 800	80.0


Size Ref.	Outside Length in inches (La)
5VX 810	81.0
5VX 840	84.0
5VX 850	85.0
5VX 860	86.0
5VX 880	88.0
5VX 900	90.0
5VX 930	93.0
5VX 950	95.0
5VX 960	96.0
5VX 1000	100.0
5VX 1030	103.0
5VX 1060	106.0
5VX 1080	108.0
5VX 1120	112.0
5VX 1150	115.0
5VX 1180	118.0
5VX 1230	123.0
5VX 1250	125.0
5VX 1320	132.0
5VX 1400	140.0
5VX 1500	150.0
5VX 1600	160.0
5VX 1700	170.0
5VX 1800	180.0
5VX 1900	190.0
5VX 1950	195.0

Heat and Oil resistant, Antistatic
Belt Weight 3VX: 0.073 kg/m, 0.00409 lbs/inch
Belt Weight 5VX: 0.173 kg/m, 0.00968 lbs/inch
Standards: RMA IP 22, API 1B

Sizes not mentioned in this catalog can be supplied on request



Cogged Metric Wedge Belts
Courroas trapeziales - de flancos abiertos, dentadas
Keilriemen flankenoffen, formgezahnt



Top width 'T' - 10 mm
Height 'H' - 8 mm

Section SPZX

Size Ref.	Pitch Length in mm (Lp)
SPZX 612	612
SPZX 630	630
SPZX 637	637
SPZX 640	640
SPZX 660	660
SPZX 672	672
SPZX 680	680
SPZX 682	682
SPZX 710	710
SPZX 722	722
SPZX 730	730
SPZX 737	737
SPZX 750	750
SPZX 762	762
SPZX 787	787
SPZX 800	800
SPZX 812	812
SPZX 825	825
SPZX 837	837
SPZX 850	850
SPZX 862	862
SPZX 875	875
SPZX 887	887
SPZX 900	900
SPZX 912	912
SPZX 925	925
SPZX 937	937
SPZX 950	950
SPZX 962	962
SPZX 987	987
SPZX 1000	1000
SPZX 1010	1010
SPZX 1012	1012
SPZX 1037	1037
SPZX 1047	1047
SPZX 1060	1060
SPZX 1077	1077
SPZX 1080	1080
SPZX 1087	1087
SPZX 1112	1112
SPZX 1120	1120

Size Ref.	Pitch Length in mm (Lp)
SPZX 1137	1137
SPZX 1140	1140
SPZX 1150	1150
SPZX 1162	1162
SPZX 1180	1180
SPZX 1187	1187
SPZX 1202	1202
SPZX 1210	1210
SPZX 1212	1212
SPZX 1227	1227
SPZX 1237	1237
SPZX 1250	1250
SPZX 1262	1262
SPZX 1270	1270
SPZX 1287	1287
SPZX 1312	1312
SPZX 1320	1320
SPZX 1337	1337
SPZX 1340	1340
SPZX 1362	1362
SPZX 1387	1387
SPZX 1400	1400
SPZX 1412	1412
SPZX 1420	1420
SPZX 1430	1430
SPZX 1437	1437
SPZX 1450	1450
SPZX 1462	1462
SPZX 1470	1470
SPZX 1487	1487
SPZX 1500	1500
SPZX 1512	1512
SPZX 1520	1520
SPZX 1527	1527
SPZX 1537	1537
SPZX 1560	1560
SPZX 1562	1562
SPZX 1587	1587
SPZX 1600	1600
SPZX 1612	1612
SPZX 1637	1637
SPZX 1650	1650
SPZX 1662	1662

Size Ref.	Pitch Length in mm (Lp)
SPZX 1687	1687
SPZX 1700	1700
SPZX 1712	1712
SPZX 1737	1737
SPZX 1750	1750
SPZX 1762	1762
SPZX 1787	1787
SPZX 1800	1800
SPZX 1812	1812
SPZX 1837	1837
SPZX 1850	1850
SPZX 1862	1862
SPZX 1887	1887
SPZX 1900	1900
SPZX 1937	1937
SPZX 1950	1950
SPZX 1962	1962
SPZX 1987	1987
SPZX 2000	2000
SPZX 2030	2030
SPZX 2037	2037
SPZX 2062	2062
SPZX 2087	2087
SPZX 2120	2120
SPZX 2137	2137
SPZX 2187	2187
SPZX 2240	2240
SPZX 2280	2280
SPZX 2287	2287
SPZX 2300	2300
SPZX 2360	2360
SPZX 2410	2410
SPZX 2437	2437
SPZX 2487	2487
SPZX 2500	2500
SPZX 2540	2540
SPZX 2650	2650
SPZX 2800	2800
SPZX 2840	2840
SPZX 3000	3000
SPZX 3150	3150
SPZX 3350	3350
SPZX 3550	3550

'SPZX' range
upto 4850 mm


Heat and Oil resistant, Antistatic
Belt Weight: 0.073 kg/m, 0.00409 lbs/inch
Standards: DIN 7753, BS 3790

Sizes not mentioned in this catalog can be supplied on request





Cogged Metric Wedge Belts
Courreas trapeziales - de flancos abiertos, dentadas
Keilriemen flankenoffen, formgezahnt



Top width 'T' - 13 mm
Height 'H' - 10 mm

Section SPAX

Size Ref.	Pitch Length in mm (Lp)
-----------	-------------------------

SPAX 730	730
SPAX 732	732
SPAX 750	750
SPAX 760	760
SPAX 762	762
SPAX 772	772
SPAX 782	782
SPAX 800	800
SPAX 820	820
SPAX 832	832
SPAX 850	850
SPAX 900	900
SPAX 910	910
SPAX 922	922
SPAX 932	932
SPAX 950	950
SPAX 967	967
SPAX 982	982
SPAX 1000	1000
SPAX 1032	1032
SPAX 1060	1060
SPAX 1082	1082
SPAX 1107	1107
SPAX 1120	1120
SPAX 1132	1132
SPAX 1150	1150
SPAX 1157	1157
SPAX 1180	1180
SPAX 1207	1207
SPAX 1232	1232
SPAX 1250	1250
SPAX 1257	1257
SPAX 1272	1272
SPAX 1282	1282
SPAX 1300	1300
SPAX 1307	1307
SPAX 1320	1320
SPAX 1332	1332
SPAX 1340	1340
SPAX 1357	1357
SPAX 1360	1360
SPAX 1375	1375

Size Ref.	Pitch Length in mm (Lp)
-----------	-------------------------

SPAX 1382	1382
SPAX 1400	1400
SPAX 1425	1425
SPAX 1430	1430
SPAX 1432	1432
SPAX 1450	1450
SPAX 1457	1457
SPAX 1482	1482
SPAX 1500	1500
SPAX 1507	1507
SPAX 1525	1525
SPAX 1532	1532
SPAX 1550	1550
SPAX 1557	1557
SPAX 1582	1582
SPAX 1600	1600
SPAX 1607	1607
SPAX 1630	1630
SPAX 1632	1632
SPAX 1650	1650
SPAX 1657	1657
SPAX 1662	1662
SPAX 1675	1675
SPAX 1680	1680
SPAX 1682	1682
SPAX 1700	1700
SPAX 1707	1707
SPAX 1732	1732
SPAX 1750	1750
SPAX 1757	1757
SPAX 1782	1782
SPAX 1800	1800
SPAX 1807	1807
SPAX 1832	1832
SPAX 1850	1850
SPAX 1857	1857
SPAX 1882	1882
SPAX 1900	1900
SPAX 1907	1907
SPAX 1932	1932
SPAX 1950	1950
SPAX 1982	1982
SPAX 2000	2000

Size Ref.	Pitch Length in mm (Lp)
-----------	-------------------------

SPAX 2032	2032
SPAX 2057	2057
SPAX 2082	2082
SPAX 2120	2120
SPAX 2132	2132
SPAX 2182	2182
SPAX 2240	2240
SPAX 2300	2300
SPAX 2307	2307
SPAX 2332	2332
SPAX 2360	2360
SPAX 2382	2382
SPAX 2432	2432
SPAX 2482	2482
SPAX 2500	2500
SPAX 2532	2532
SPAX 2582	2582
SPAX 2607	2607
SPAX 2650	2650
SPAX 2682	2682
SPAX 2732	2732
SPAX 2782	2782
SPAX 2800	2800
SPAX 2832	2832
SPAX 2882	2882
SPAX 2982	2982
SPAX 3000	3000
SPAX 3070	3070
SPAX 3082	3082
SPAX 3150	3150
SPAX 3182	3182
SPAX 3282	3282
SPAX 3350	3350
SPAX 3482	3482
SPAX 3550	3550
SPAX 3750	3750
SPAX 4000	4000
SPAX 4250	4250
SPAX 4500	4500

Heat and Oil resistant, Antistatic
Belt Weight: 0.123 kg/m, 0.00688 lbs/inch
Standards: DIN 7753, BS 3790


Sizes not mentioned in this catalog can be supplied on request



Cogged Metric Wedge Belts

Courreas trapeziales - de flancos abiertos, dentadas

Keilriemen flankenoffen, formgezahnt



Section	SPBX	SPCX
Top width 'T'	16mm	22mm
Height 'H'	13mm	18mm

Section SPBX

Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPBX 1250	1250	SPBX 2240	2240
SPBX 1320	1320	SPBX 2280	2280
SPBX 1340	1340	SPBX 2300	2300
SPBX 1400	1400	SPBX 2360	2360
SPBX 1410	1410	SPBX 2361	2361
SPBX 1450	1450	SPBX 2410	2410
SPBX 1500	1500	SPBX 2500	2500
SPBX 1510	1510	SPBX 2530	2530
SPBX 1590	1590	SPBX 2650	2650
SPBX 1600	1600	SPBX 2680	2680
SPBX 1690	1690	SPBX 2800	2800
SPBX 1700	1700	SPBX 2990	2990
SPBX 1800	1800	SPBX 3000	3000
SPBX 1900	1900	SPBX 3150	3150
SPBX 2000	2000	SPBX 3350	3350
SPBX 2020	2020	SPBX 3550	3550
SPBX 2098	2098	SPBX 3750	3750
SPBX 2120	2120	SPBX 3800	3800
SPBX 2150	2150	SPBX 4000	4000
SPBX 2180	2180	SPBX 4250	4250
		SPBX 4500	4500

Section SPCX

Size Ref.	Pitch Length in mm (Lp)
SPCX2240	2240
SPCX2360	2360
SPCX2500	2500
SPCX2650	2650
SPCX2800	2800
SPCX3000	3000
SPCX3150	3150
SPCX3350	3350
SPCX3550	3550
SPCX3750	3750
SPCX4000	4000
SPCX4250	4250
SPCX4500	4500

Heat and Oil resistant, Antistatic

Belt Weight SPBX: 0.173 kg/m, 0.00968 lbs/inch

Belt Weight SPCX: 0.290 kg/m, 0.01623 lbs/inch

Standards: DIN 7753, BS 3790

Sizes not mentioned in this catalog can be supplied on request





Banded Belts
Correas multiples formadas
por correas trapeciales
Kraftband



Section	A	B	C
Pitch Width	15.88	19.05	25.50

N- No. of ribs

Section A

Size Ref.	Pitch Length in mm (Lp)
A42	1100
A43	1130
A44	1150
A48	1250
A51	1330
A53	1380
A55	1430
A57	1480
A60	1560
A62	1660
A65	1680
A68	1760
A70	1810
A71	1840
A74	1910
A75	1940
A78	2010
A80	2070
A85	2190
A90	2320
A92	2370
A96	2470
A100	2570
A105	2700
A110	2830
A112	2880
A120	3080
A128	3280
A136	3490
A144	3690
A150	3850

Section B

Size Ref.	Pitch Length in mm (Lp)
B42	1110
B43	1140
B46	1210
B50	1310
B55	1440
B60	1570
B65	1690
B67	1740
B70	1820
B73	1900
B75	1950
B80	2080
B82	2130
B85	2200
B90	2330
B95	2460
B100	2580
B105	2710
B108	2790
B112	2890
B120	3090
B128	3290
B133	3420
B136	3500
B144	3700
B150	3850
B158	4060
B162	4160
B255	6520
B270	6900
B300	7660

Section C

Size Ref.	Pitch Length in mm (Lp)
C60	1580
C62	1630
C68	1780
C75	1960
C81	2110
C85	2220
C90	2340
C99	2570
C100	2600
C105	2720
C109	2820
C112	2900
C120	3100
C128	3310
C136	3510
C144	3710
C158	4070
C173	4450
C195	5010
C210	5390
C240	6150
C270	6910
C300	7680
C315	8060
C330	8440
C360	9200
C390	9960
C420	10720

Section D

Size Ref.	Pitch Length in mm (Lp)
D142	142
D147	147
D152	152
D157	157
D162	162
D167	167
D172	172
D177	177
D182	182
D187	187
D192	192
D197	197
D202	202
D207	207
D212	212
D217	217
D222	222
D227	227
D232	232
D237	237
D242	242

Heat and Oil resistant, Antistatic

Max no. of ribs: A:42"-150": 6

B:42" - 173": 6 ; 74" - 598": 5

C:62" - 120": 4 ; 121" - 598": 5

D:142" - 275": 5

Standards: DIN 7753, RMA IP 20, API 1B

Sizes not mentioned in this catalog can be supplied on request



Banded Belts

Correas multiples formadas
por correas trapeziales
Kraftband



Section	SPA	SPB
Pitch Width	15	19.05

N- No. of ribs

Section SPA

Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPA1100	1100	SPA3100	3100
SPA1150	1150	SPA3150	3150
SPA1200	1200	SPA3200	3200
SPA1250	1250	SPA3250	3250
SPA1300	1300	SPA3300	3300
SPA1350	1350	SPA3350	3350
SPA1400	1400	SPA3400	3400
SPA1450	1450	SPA3450	3450
SPA1500	1500	SPA3500	3500
SPA1550	1550		
SPA1600	1600		
SPA1650	1650		
SPA1700	1700		
SPA1750	1750		
SPA1800	1800		
SPA1850	1850		
SPA1900	1900		
SPA1950	1950		
SPA2000	2000		
SPA2050	2050		
SPA2100	2100		
SPA2150	2150		
SPA2200	2200		
SPA2250	2250		
SPA2300	2300		
SPA2350	2350		
SPA2400	2400		
SPA2450	2450		
SPA2500	2500		
SPA2550	2550		
SPA2600	2600		
SPA2650	2650		
SPA2700	2700		
SPA2750	2750		
SPA2800	2800		
SPA2850	2850		
SPA2900	2900		
SPA2950	2950		
SPA3000	3000		
SPA3050	3050		

Section SPB

Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPB2350	2350	SPB9550	9550
SPB2500	2500	SPB9700	9700
SPB2650	2650	SPB9850	9850
SPB2800	2800	SPB10000	10000
SPB2950	2950	SPB10150	10150
SPB3100	3100	SPB10300	10300
SPB3250	3250	SPB10450	10450
SPB3400	3400	SPB10600	10600
SPB3550	3550		
SPB3700	3700		
SPB3850	3850		
SPB4000	4000		
SPB4150	4150		
SPB4300	4300		
SPB4450	4450		
SPB4600	4600		
SPB4750	4750		
SPB4900	4900		
SPB5050	5050		
SPB5200	5200		
SPB5350	5350		
SPB5500	5500		
SPB5650	5650		
SPB5800	5800		
SPB5950	5950		
SPB6100	6100		
SPB6250	6250		
SPB6400	6400		
SPB6550	6550		
SPB6700	6700		
SPB6850	6850		
SPB7000	7000		
SPB7150	7150		
SPB7300	7300		
SPB7450	7450		
SPB7600	7600		
SPB7750	7750		
SPB7900	7900		
SPB8050	8050		
SPB8200	8200		
SPB8350	8350		
SPB8500	8500		
SPB8650	8650		
SPB8800	8800		
SPB8950	8950		
SPB9100	9100		
SPB9250	9250		
SPB9400	9400		

Heat and Oil resistant, Antistatic

Max no. of ribs: SPA : 1100mm - 3100mm: 8 Band
SPB : 1100mm - 3100mm: 6 Band

Sizes not mentioned in this catalog can be supplied on request





Banded Belts
Correas multiples formadas
por correas trapeciales
Kraftband



Section	SPC	SPZ
Pitch Width	25.4	12

N- No. of ribs

Section SPC

Size Ref.	Pitch Length in mm (Lp)	Size Ref.	Pitch Length in mm (Lp)
SPC2500	2500	SPC8500	8500
SPC2650	2650	SPC8650	8650
SPC2800	2800	SPC8800	8800
SPC2950	2950	SPC8950	8950
SPC3100	3100	SPC9100	9100
SPC3250	3250	SPC9250	9250
SPC3400	3400	SPC9400	9400
SPC3550	3550	SPC9550	9550
SPC3700	3700	SPC9700	9700
SPC3950	3850	SPC9850	9850
SPC4000	4000	SPC10000	10000
SPC4150	4150	SPC10150	10150
SPC4300	4300	SPC10300	10300
SPC4450	4450	SPC10450	10450
SPC4600	4600	SPC10600	10600
SPC4750	4750		
SPC4900	4900		
SPC5050	5050		
SPC5200	5200		
SPC5350	5350		
SPC5500	5500		
SPC5650	5650		
SPC5800	5800		
SPC5950	5950		
SPC6100	6100		
SPC6250	6250		
SPC6400	6400		
SPC6550	6550		
SPC6700	6700		
SPC6850	6850		
SPC7000	7000		
SPC7150	7150		
SPC7300	7300		
SPC7450	7450		
SPC7600	7600		
SPC7750	7750		
SPC7900	7900		
SPC8050	8050		
SPC8200	8200		
SPC8350	8350		

Section SPZ

Size Ref.	Pitch Length in mm (Lp)
SPZ1100	1100
SPZ1125	1125
SPZ1150	1150
SPZ1175	1175
SPZ1200	1200
SPZ1225	1225
SPZ1250	1250
SPZ1275	1275
SPZ1300	1300
SPZ1325	1325
SPZ1350	1350
SPZ1375	1375
SPZ1400	1400
SPZ1425	1425
SPZ1450	1450
SPZ1475	1475
SPZ1500	1500
SPZ1525	1525
SPZ1550	1550
SPZ1575	1575
SPZ1600	1600
SPZ1625	1625
SPZ1650	1650
SPZ1675	1675
SPZ1700	1700
SPZ1725	1725
SPZ1750	1750
SPZ1775	1775
SPZ1800	1800
SPZ1825	1825
SPZ1850	1850
SPZ1875	1875
SPZ1900	1900

Heat and Oil resistant, Antistatic

Max no.of ribs: SPC : 2280mm - 3100mm: 6 Band
SPZ : 1100mm - 3100mm: 8 Band

Sizes not mentioned in this catalog can be supplied on request



Banded Belts

Correas multiples formadas
por correas trapeciales
Kraftband



Section	3V	5V	8V
Pitch Width	10.3	17.5	28.6

N- No. of ribs

Section 3V

Size Ref.	Outside Length in inches (La)
3V420	42
3V425	42.5
3V450	45
3V475	47.5
3V500	50
3V530	53
3V560	56
3V600	60
3V630	63
3V710	71
3V750	75
3V800	80
3V850	85
3V900	90
3V950	95
3V1000	100
3V1060	106
3V1120	112
3V1180	118
3V1250	125
3V1320	132
3V1400	140

Section 5V

Size Ref.	Outside Length in inches (La)
5V950	95
5V1000	100
5V1060	106
5V1120	112
5V1180	118
5V1250	125
5V1320	132
5V1400	140
5V1500	150
5V1600	160
5V1700	170
5V1800	180
5V1900	190
5V2000	200
5V2120	212
5V2240	224
5V2360	236
5V2500	250
5V2650	265
5V2800	280
5V3000	300
5V3150	315
5V3350	335
5V3500	350

Section 8V

Size Ref.	Outside Length in inches (La)
8V1000	100
8V1060	106
8V1120	112
8V1180	118
8V1250	125
8V1320	132
8V1400	140
8V1500	150
8V1600	160
8V1700	170
8V1800	180
8V1900	190
8V2000	200
8V2120	212
8V2240	224
8V2360	236
8V2500	250
8V2650	265
8V2800	280
8V3000	300
8V3150	315
8V3350	335
8V3550	355
8V3750	375
8V4000	400
8V4250	425
8V4500	450
8V4750	475
8V5000	500
8V5600	560

Heat and Oil resistant, Antistatic

Max no.of ribs: 3V:420-1500: 6

5V:950-1750: 6 ; 1760-5980: 5

8V:1000- 5980: 5

Standards: RMA IP 22, API 1B

Sizes not mentioned in this catalog can be supplied on request





Banded Belts
Correas multiples formadas
por correas trapeciales
Kraftband



Section	AX	BX	CX
Pitch Width	15.88	19.05	25.50

N– No. of ribs

Section AX

Size Ref.	Pitch Length in mm (Lp)
AX43	43
AX45	45
AX47	47
AX49	49
AX51	51
AX53	53
AX55	55
AX67	57
AX59	59
AX61	61
AX63	63
AX65	65
AX67	67
AX69	69
AX71	71
AX73	73
AX75	75
AX77	77
AX79	79
AX81	81
AX83	83
AX85	85
AX87	87
AX89	89
AX91	91
AX93	93
AX95	95
AX97	97
AX99	99
AX101	101
AX103	103
AX105	105
AX107	107
AX109	109
AX111	111
AX113	113
AX115	115
AX117	117
AX119	119
AX121	121

Section BX

Size Ref.	Pitch Length in mm (Lp)
BX43	43
BX45	45
BX47	47
BX49	49
BX51	51
BX53	53
BX55	55
BX67	57
BX59	59
BX61	61
BX63	63
BX65	65
BX67	67
BX69	69
BX71	71
BX73	73
BX75	75
BX77	77
BX79	79
BX81	81
BX83	83
BX85	85
BX87	87
BX89	89
BX91	91
BX93	93
BX95	95
BX97	97
BX99	99
BX101	101
BX103	103
BX105	105
BX107	107
BX109	109
BX111	111
BX113	113
BX115	115
BX117	117
BX119	119
BX121	121

Section CX

Size Ref.	Pitch Length in mm (Lp)
CX43	43
CX45	45
CX47	47
CX49	49
CX51	51
CX53	53
CX55	55
CX67	57
CX59	59
CX61	61
CX63	63
CX65	65
CX67	67
CX69	69
CX71	71
CX73	73
CX75	75
CX77	77
CX79	79
CX81	81
CX83	83
CX85	85
CX87	87
CX89	89
CX91	91
CX93	93
CX95	95
CX97	97
CX99	99
CX101	101
CX103	103
CX105	105
CX107	107
CX109	109
CX111	111
CX113	113
CX115	115
CX117	117
CX119	119
CX121	121

Heat and Oil resistant, Antistatic
Max no.of ribs: AX 42" - 122": 8
BX 42" - 122": 6
CX 42" - 122": 6

Standards:

Sizes not mentioned in this catalog can be supplied on request



Banded Belts

Correas multiples formadas
por correas trapeziales
Kraftband



Section	SPAX	SPBX	SPCX	SPZX
Pitch Width	15	19.05	25.4	12

N- No. of ribs

Section SPAX

Size Ref.	Pitch Length in mm (Lp)
SPAX1100	1100
SPAX1150	1150
SPAX1200	1200
SPAX1250	1250
SPAX1300	1300
SPAX1350	1350
SPAX1400	1400
SPAX1450	1450
SPAX1500	1500
SPAX1550	1550
SPAX1650	1600
SPAX1650	1650
SPAX1700	1700
SPAX1750	1750
SPAX1800	1800
SPAX1850	1850
SPAX1900	1900
SPAX1950	1950
SPAX2000	2000
SPAX2050	2050
SPAX2100	2100
SPAX2150	2150
SPAX2200	2200
SPAX2250	2250
SPAX2300	2300
SPAX2350	2350
SPAX2400	2400
SPAX2450	2450
SPAX2500	2500
SPAX2550	2550
SPAX2600	2600
SPAX2650	2650
SPAX2700	2700
SPAX2750	2750
SPAX2800	2800
SPAX2850	2850
SPAX2900	2900
SPAX2950	2950
SPAX3000	3000
SPAX3050	3050
SPAX3100	3100

Section SPBX

Size Ref.	Pitch Length in mm (Lp)
SPBX1100	1100
SPBX1150	1150
SPBX1200	1200
SPBX1250	1250
SPBX1300	1300
SPBX1350	1350
SPBX1400	1400
SPBX1450	1450
SPBX1500	1500
SPBX1550	1550
SPBX1650	1600
SPBX1650	1650
SPBX1700	1700
SPBX1750	1750
SPBX1800	1800
SPBX1850	1850
SPBX1900	1900
SPBX1950	1950
SPBX2000	2000
SPBX2050	2050
SPBX2100	2100
SPBX2150	2150
SPBX2200	2200
SPBX2250	2250
SPBX2300	2300
SPBX2350	2350
SPBX2400	2400
SPBX2450	2450
SPBX2500	2500
SPBX2550	2550
SPBX2600	2600
SPBX2650	2650
SPBX2700	2700
SPBX2750	2750
SPBX2800	2800
SPBX2850	2850
SPBX2900	2900
SPBX2950	2950
SPBX3000	3000
SPBX3050	3050
SPBX3100	3100

Section SPCX

Size Ref.	Pitch Length in mm (Lp)
SPCX2280	2280
SPCX2300	2300
SPCX2320	2320
SPCX2340	2340
SPCX2360	2360
SPCX2380	2380
SPCX2400	2400
SPCX2420	2420
SPCX2440	2440
SPCX2460	2460
SPCX2480	2480
SPCX2500	2500
SPCX2520	2520
SPCX2540	2540
SPCX2560	2560
SPCX2580	2580
SPCX2600	2600
SPCX2620	2620
SPCX2640	2640
SPCX2660	2660
SPCX2680	2680
SPCX2700	2700
SPCX2720	2720
SPCX2740	2740
SPCX2760	2760
SPCX2780	2780
SPCX2800	2800
SPCX2820	2820
SPCX2840	2840
SPCX2860	2860
SPCX2880	2880
SPCX2900	2900
SPCX2920	2920
SPCX2940	2940
SPCX2960	2960
SPCX2980	2980
SPCX3000	3000
SPCX3020	3020
SPCX3040	3040
SPCX3060	3060
SPCX3080	3080
SPCX3100	3100

Section SPZX

Size Ref.	Pitch Length in mm (Lp)
SPZX1100	1100
SPZX1150	1150
SPZX1200	1200
SPZX1250	1250
SPZX1300	1300
SPZX1350	1350
SPZX1400	1400
SPZX1450	1450
SPZX1500	1500
SPZX1550	1550
SPZX1650	1600
SPZX1650	1650
SPZX1700	1700
SPZX1750	1750
SPZX1800	1800
SPZX1850	1850
SPZX1900	1900
SPZX1950	1950
SPZX2000	2000
SPZX2050	2050
SPZX2100	2100
SPZX2150	2150
SPZX2200	2200
SPZX2250	2250
SPZX2300	2300
SPZX2350	2350
SPZX2400	2400
SPZX2450	2450
SPZX2500	2500
SPZX2550	2550
SPZX2600	2600
SPZX2650	2650
SPZX2700	2700
SPZX2750	2750
SPZX2800	2800
SPZX2850	2850
SPZX2900	2900
SPZX2950	2950
SPZX3000	3000
SPZX3050	3050
SPZX3100	3100

Heat and Oil resistant, Antistatic

Max no.of ribs: SPAX :1100mm - 3100mm: 8

SPBX :1100mm - 3100mm: 6

SPCX:1100mm - 3100mm: 6

Standards: SPZX :1100mm - 3100mm: 8

Sizes not mentioned in this catalog can be supplied on request

Banded Belts





Banded Belts
Correas multiples formadas
por correas trapeciales
Kraftband



Section	3VX	5VX
Pitch Width	10.3	17.5

N- No. of ribs

Section 3VX

Size Ref.	Outside Length in inches (La)	Size Ref.	Outside Length in inches (La)
3VX470	47	3VX3250	325
3VX490	49	3VX3350	335
3VX510	51	3VX3450	345
3VX530	53	3VX3550	355
3VX550	55	3VX3650	365
3VX570	57	3VX3750	375
3VX590	59	3VX3850	385
3VX610	61	3VX3950	395
3VX630	63	3VX4050	405
3VX650	65	3VX4150	405
3VX670	67	3VX4250	405
3VX690	69	3VX4050	405
3VX750	75	3VX4150	415
3VX810	81	3VX4200	420
3VX870	87		
3VX930	93		
3VX990	99		
3VX1050	105		
3VX1110	111		
3VX1180	118		
3VX1250	125		
3VX1350	135		
3VX1450	145		
3VX1550	155		
3VX1650	165		
3VX1750	175		
3VX1850	185		
3VX1950	195		
3VX2050	205		
3VX2150	215		
3VX2250	225		
3VX2350	235		
3VX2450	245		
3VX2550	255		
3VX2650	265		
3VX2750	275		
3VX2850	285		
3VX2950	295		
3VX3050	305		
3VX3150	315		

Section 5VX


Size Ref.	Outside Length in inches (La)	Size Ref.	Outside Length in inches (La)
5VX470	47	5VX3250	325
5VX490	49	5VX3350	335
5VX510	51	5VX3450	345
5VX530	53	5VX3550	355
5VX550	55	5VX3650	365
5VX570	57	5VX3750	375
5VX590	59	5VX3850	385
5VX610	61	5VX3950	395
5VX630	63	5VX4050	405
5VX650	65	5VX4150	405
5VX670	67	5VX4250	405
5VX690	69	5VX4050	405
5VX750	75	5VX4150	415
5VX810	81	5VX4200	420
5VX870	87		
5VX930	93		
5VX990	99		
5VX1050	105		
5VX1110	111		
5VX1180	118		
5VX1250	125		
5VX1350	135		
5VX1450	145		
5VX1550	155		
5VX1650	165		
5VX1750	175		
5VX1850	185		
5VX1950	195		
5VX2050	205		
5VX2150	215		
5VX2250	225		
5VX2350	235		
5VX2450	245		
5VX2550	255		
5VX2650	265		
5VX2750	275		
5VX2850	285		
5VX2950	295		
5VX3050	305		
5VX3150	315		

Heat and Oil resistant, Antistatic
Max no. of ribs: 3VX 470-4200: 8
5VX 470-4200: 6

Standards: RMA IP 22, API 1B
Sizes not mentioned in this catalog can be supplied on request



Hexagonal Belts
Correas hexagonales
Doppelkeilriemen



Section	AA	BB	CC
Top width 'T'	13	17	22
Height 'H'	10	13	17

Section AA

Size Ref.	Pitch Length in mm (Lp)
AA62	1610
AA75	1940
AA90	2320
AA92	2370
AA102	2620
AA105	2700
AA112	2880
AA120	3080
AA152	3890
AA175	4480

Section BB

Size Ref.	Pitch Length in mm (Lp)
BB62	1620
BB68	1770
BB75	1950
BB90	2330
BB100	2580
BB105	2710
BB111	2860
BB120	3090
BB130	3350
BB155	3980
BB173	4440
BB182	4670
BB210	5380
BB240	6140
BB270	6900
BB275	7030

Section CC

Size Ref.	Pitch Length in mm (Lp)
CC88	2290
CC96	2490
CC105	2720
CC128	3310
CC144	3710
CC180	4630
CC195	5010
CC210	5390
CC240	6150
CC270	6910
CC275	7040

Hexagonal Belts


Heat and Oil resistant, Antistatic
Standards: DIN 7722, ASAE S 21 I.4, ISO 5289, RMA IP 21

Sizes not mentioned in this catalog can be supplied on request





Multirib/Serpentine Belts
Correas Poly-V
Rippenband



Section	PH	PJ
Pitch 'P'	0.06" ; 1.60mm	0.092" ; 2.34mm
Height 'H'	0.011" ; 2.80mm	0.16" ; 3.8mm

Section PH

Size Ref.	Effective Length in inches (Le)	Effective Length in mm (Le)
520 H	52	1321
530 H	53	1346
540 H	54	1372
550 H	55	1397
560 H	56	1422
580 H	58	1473
610 H	61	1549
625 H	62.5	1588
655 H	65.5	1664
690 H	69	1753
730 H	73	1854
745 H	74.5	1892
750 H	75	1905
760 H	76	1930
770 H	77	1956
775 H	77.5	1969
780 H	78	1981
785 H	78.5	1994
790 H	79	2007
800 H	80	2032
810 H	81	2057
820 H	82	2083
830 H	83	2108
840 H	84	2134
850 H	85	2159
860 H	86	2184
870 H	87	2210
880 H	88	2235
890 H	89	2261
900 H	90	2286
910 H	91	2311
920 H	92	2337
930 H	93	2362
940 H	94	2388
950 H	95	2413
960 H	96	2438
970 H	97	2464
980 H	98	2489
990 H	99	2515
1000 H	100	2540

Section PJ


Size Ref.	Effective Length in inches (La)	Effective Length in mm (Lp)
190 J	19	483
200 J	20	508
220 J	22	559
230 J	23	584
240 J	24	610
260 J	26	660
280 J	28	711
285 J	28.5	724
300 J	30	762
320 J	32	813
340 J	34	864
360 J	36	914
370 J	37	940
380 J	38	965
400 J	40	1016
415 J	41.5	1054
430 J	43	1092
435 J	43.5	1105
440 J	44	1118
445 J	44.5	1130
450 J	45	1143
460 J	46	1168
470 J	47	1194
480 J	48	1219
485 J	48.5	1232
490 J	49	1245
500 J	50	1270
505 J	50.5	1283
510 J	51	1295
515 J	51.5	1308
520 J	52	1321
530 J	53	1346
540 J	54	1372
550 J	55	1397
560 J	56	1422
580 J	58	1473
610 J	61	1549
625 J	62.5	1588
650 J	65	1651
655 J	65.5	1664

Size Ref.	Effective Length in inches (La)	Effective Length in mm (Lp)
690 J	69	1753
730 J	73	1854
745 J	74.5	1892
750 J	750	1905
770 J	770	1956
775 J	775	1969
785 J	785	1994
820 J	820	2083
870 J	870	2210
890 J	890	2261
900 J	900	2286
920 J	920	2337
940 J	940	2388
960 J	960	2438
980 J	980	2489
1000 J	1000	2540

Heat and Oil resistant, Antistatic
Belt Weight PH: 0.006 kg/rib mtr, 0.00034 lbs/inch
Belt Weight PJ: 0.010 kg/rib mtr, 0.00056 lbs/inch
Standards: RMA IP 26, SAE J 1459, ISO 9981, JASO E 109
Max no.of ribs: PH: 24 ; PJ: 24

Sizes not mentioned in this catalog can be supplied on request

Multirib/Serpentine Belts
Correas Poly-V
Rippenband



Section	PL	PM
Pitch 'P'	0.185" ; 4.70mm	0.37" ; 9.40mm
Height 'H'	0.38" ; 7mm	0.66" ; 13.5mm

Section PL

Size Ref.	Effective Length in inches (Le)	Effective Length in mm (Le)
500 L	50	1270
525 L	52.5	1334
540 L	54	1372
550 L	55	1397
560 L	56	1422
580 L	58	1473
615 L	61.5	1562
635 L	63.5	1613
655 L	65.5	1664
675 L	67.5	1715
710 L	71	1803
725 L	72.5	1842
765 L	76.5	1943
780 L	78	1981
795 L	79.5	2019
815 L	81.5	2070
825 L	82.5	2096
840 L	84	2134
865 L	86.5	2197
880 L	88	2235
915 L	91.5	2324
930 L	93	2362
975 L	97.5	2477
990 L	99	2515
1065 L	106.5	2705
1080 L	108	2743
1120 L	112	2845
1140 L	114	2896
1150 L	115	2921
1180 L	118	2997
1215 L	121.5	3086
1230 L	123	3124
1295 L	129.5	3289
1310 L	131	3327

Size Ref.	Effective Length in inches (Le)	Effective Length in mm (Le)
1375 L	137.5	3493
1455 L	145.5	3696
1595 L	159.5	4051
1650 L	165	4191
1760 L	176	4470
1820 L	182	4623
1980 L	198	5029
2120 L	212	5385
2400 L	240	6096
2410 L	241	6121
2710 L	271	6883
3010 L	301	7645
3310 L	331	8407
3610 L	361	9169
3910 L	391	9931

Section PM

Size Ref.	Effective Length in inches (Le)	Effective Length in mm (Le)
990 M	99	2515
1060 M	106	2692
1115 M	111.5	2832
1150 M	115	2921
1185 M	118.5	3010
1230 M	123	3124
1310 M	131	3327
1390 M	139	3531
1470 M	147	3734
1610 M	161	4089
1650 M	165	4191
1760 M	176	4470
1830 M	183	4648
1980 M	198	5029
2130 M	213	5410
2410 M	241	6121
2710 M	271	6883
3010 M	301	7645
3310 M	331	8407
3610 M	361	9169
3910 M	391	9931

Heat and Oil resistant, Antistatic
Belt Weight PL: 0.037 kg/rib mtr, 0.00207 lbs/inch
Belt Weight PM: 0.120 kg/rib mtr, 0.00672 lbs/inch
Standards: RMA IP 26, SAE J 1459, ISO 9981, JASO E 109
Max no.of ribs: PL: 50; PM: 36


Sizes not mentioned in this catalog can be supplied on request



Multirib - PL, PM Section Belts




Timing Belts
Correas planas dentadas
Zahnflachriemen

**Section XL - Pitch 1/5"**

Length Code	Pitch Length inch	No. of Teeth
60XL	6.00	30
70XL	7.00	35
76XL	7.60	38
80XL	8.00	40
90XL	9.00	45
96XL	9.60	48
100XL	10.00	50
102XL	10.20	51
106XL	10.60	53
108XL	10.80	54
110XL	11.00	55
112XL	11.20	56
114XL	11.40	57
116XL	11.60	58
118XL	11.80	59
120XL	12.00	60
124XL	12.40	62
126XL	12.60	63
130XL	13.00	65
132XL	13.20	66
136XL	13.60	68
140XL	14.00	70
146XL	14.60	73
150XL	15.00	75
154XL	15.40	77
160XL	16.00	80
166XL	16.60	83
170XL	17.00	85
172XL	17.20	86
176XL	17.60	88
180XL	18.00	90
182XL	18.20	91
184XL	18.40	92
188XL	18.80	94
190XL	19.00	95
196XL	19.60	98
198XL	19.80	99

Length Code	Pitch Length inch	No. of Teeth
200XL	20.00	100
212XL	21.20	106
220XL	22.00	110
234XL	23.40	117
240XL	24.00	120
248XL	24.80	124
250XL	25.00	125
260XL	26.00	130
270XL	27.00	135
276XL	27.60	138
280XL	28.00	140
286XL	28.60	143
290XL	29.00	145
300XL	30.00	150
316XL	31.60	158
320XL	32.00	160
330XL	33.00	165
340XL	34.00	170
344XL	34.40	172
352XL	35.20	176
380XL	38.00	190
384XL	38.40	192
390XL	39.00	195
400XL	40.00	200
412XL	41.20	206
414XL	41.40	207
432XL	43.20	216
450XL	45.00	225
460XL	46.00	230
490XL	49.00	245
564XL	56.40	282
574XL	57.40	287
580XL	58.00	290
612XL	61.20	306
630XL	63.00	315

Standard widths:
1/4" (Code 025)
5/16" (Code 031)
3/8" (Code 037)
1/2" (Code 050)
3/4" (Code 075)
Standards: RMA IP 24

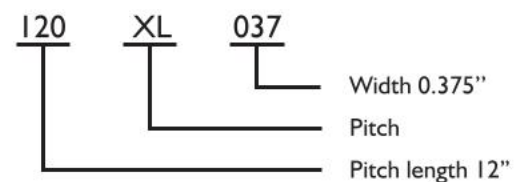


For a complete list of sizes, consult Fenner India Limited.





Timing Belts
Correas planas dentadas
Zahnflachriemen



Section L - Pitch 3/8"

Length Code	Pitch Length inch	No. of Teeth
124L	12.40	33
130L	13.00	35
135L	13.50	36
143L	14.30	38
150L	15.00	40
177L	17.70	47
180L	18.00	48
185L	18.50	49
210L	21.00	56
240L	24.00	64
244L	24.40	65
255L	25.50	68
263L	26.30	70
265L	26.50	71
270L	27.00	72
275L	27.50	73
285L	28.50	76
300L	30.00	80
320L	32.00	85
330L	33.00	88
334L	33.40	89
345L	34.50	92
360L	36.00	96
375L	37.50	100

Length Code	Pitch Length inch	No. of Teeth
382L	38.20	102
405L	40.50	108
420L	42.00	112
450L	45.00	120
453L	45.30	121
465L	46.50	124
480L	48.00	128
495L	49.50	132
510L	51.00	136
525L	52.50	140
540L	54.00	144
585L	58.50	156
600L	60.00	160
619L	61.90	165
630L	63.00	168
634L	63.40	169
660L	66.00	176

Standard widths:

1/2" (Code 050)

3/4" (Code 075)

1" (Code 100)

1 1/2" (Code 150)

2" (Code 200)


Standards: RMA IP 24

For a complete list of sizes, consult Fenner India Limited.





Timing Belts
Correas planas dentadas
Zahnflachriemen

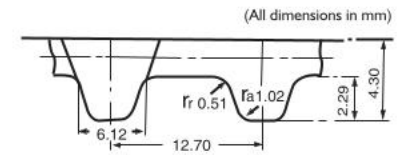**Section H - Pitch 1/2"**

Length Code	Pitch Length inch	No. of Teeth
240H	24.00	48
250H	25.00	50
260H	26.00	52
270H	27.00	54
280H	28.00	56
285H	28.50	57
290H	29.00	58
300H	30.00	60
330H	33.00	66
350H	35.00	70
355H	35.50	71
360H	36.00	72
365H	36.50	73
370H	37.00	74
375H	37.50	75
380H	38.00	76
390H	39.00	78
395H	39.50	79
400H	40.00	80
445H	44.50	89
450H	45.00	90
460H	46.00	92
480H	48.00	96
485H	48.50	97
490H	49.00	98
500H	50.00	100
550H	55.00	110
560H	56.00	112
565H	56.50	113
570H	57.00	114

Length Code	Pitch Length inch	No. of Teeth
580H	58.00	116
585H	58.50	117
590H	59.00	118
600H	60.00	120
650H	65.00	130
660H	66.00	132
670H	67.00	134
680H	68.00	136
700H	70.00	140
750H	75.00	150
770H	77.00	154
785H	78.50	157
800H	80.00	160
850H	85.00	170
900H	90.00	180
985H	98.50	197
1000H	100.00	200
1020H	102.00	204
1050H	105.00	210
1120H	112.00	224
1130H	113.00	226
1200H	120.00	240
1250H	125.00	250
1400H	140.00	280
1440H	144.00	288
1450H	145.00	290
1510H	151.00	302
1660H	166.00	332
1700H	170.00	340
1855H	185.50	371

Standard widths:
3/4" (Code 075)
1" (Code 100)
1 1/2" (Code 150)
2" (Code 200)
3" (Code 300)
Standards: RMA IP 24


For a complete list of sizes, consult Fenner India Limited.



Timing Belts
Correas planas dentadas
Zahnflachriemen

Section XH - Pitch 7/8"

Length Code	Pitch Length inch	No. of Teeth
508XH	50.80	58
560XH	56.00	64
630XH	63.00	72
700XH	70.00	80
770XH	77.00	88
800XH	80.00	91
805XH	80.50	92
840XH	84.00	96
850XH	85.00	97
980XH	98.00	112
1000XH	100.00	114
1120XH	112.00	128
1260XH	126.00	144
1400XH	140.00	160
1540XH	154.00	176
1575XH	157.00	180
1750XH	175.00	200

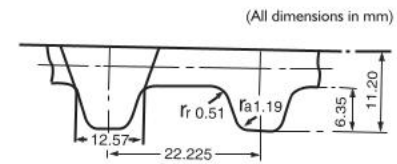

Standard widths:

2" (Code 200)

3" (Code 300)

4" (Code 400)

5" (Code 500)


Standards: RMA IP 24

For a complete list of sizes, consult Fenner India Limited.






Timing Belts
Correas planas dentadas
Zahnflachriemen

**Section 3M - Pitch 3mm**

Length Code	Pitch Length (mm)	No. of teeth
102-3M	102	34
111-3M	111	37
117-3M	117	39
120-3M	120	40
141-3M	141	47
150-3M	150	50
159-3M	159	53
168-3M	168	56
177-3M	177	59
180-3M	180	60
186-3M	186	62
192-3M	192	64
204-3M	204	68
207-3M	207	69
210-3M	210	70
213-3M	213	71
222-3M	222	74
225-3M	225	75
228-3M	228	76
234-3M	234	78
237-3M	237	79
240-3M	240	80
246-3M	246	82
270-3M	270	90
276-3M	276	92
282-3M	282	94
285-3M	285	95
306-3M	306	102
309-3M	309	103
312-3M	312	104
318-3M	318	106
324-3M	324	108
345-3M	345	115
348-3M	348	116
357-3M	357	119
360-3M	360	120
363-3M	363	121
366-3M	366	122
375-3M	375	125
384-3M	384	128

Length Code	Pitch Length (mm)	No. of teeth
390-3M	390	130
423-3M	423	141
426-3M	426	142
447-3M	447	149
459-3M	459	153
471-3M	471	157
474-3M	474	158
477-3M	477	159
492-3M	492	164
495-3M	495	165
501-3M	501	167
510-3M	510	170
513-3M	513	171
564-3M	564	188
570-3M	570	190
576-3M	576	192
579-3M	579	193
582-3M	582	194
597-3M	597	199
633-3M	633	211
639-3M	639	213
648-3M	648	216
654-3M	654	218
669-3M	669	223
675-3M	675	225
684-3M	684	228
699-3M	699	233
720-3M	720	240
750-3M	750	250
753-3M	753	251
801-3M	801	267
804-3M	804	268
939-3M	939	313
1125-3M	1125	375
1209-3M	1209	403
1245-3M	1245	415
1263-3M	1263	421
1344-3M	1344	448
1401-3M	1401	467
1569-3M	1569	523

Standard widths:
6mm, 9mm, 15mm, 20mm & 30mm
Standards: RMA IP 24

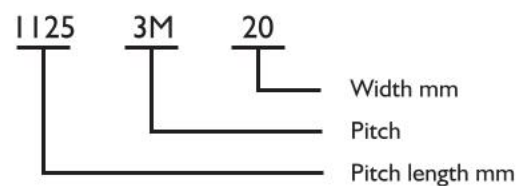


For a complete list of sizes, consult Fenner India Limited.





Timing Belts
Correas planas dentadas
Zahnflachriemen



Section 5M - Pitch 5mm

Length Code	Pitch Length (mm)	No. of teeth
200-5M	200	40
225-5M	225	45
280-5M	280	56
285-5M	285	57
295-5M	295	59
300-5M	300	60
305-5M	305	61
310-5M	310	62
320-5M	320	64
325-5M	325	65
330-5M	330	66
365-5M	365	73
370-5M	370	74
375-5M	375	75
385-5M	385	77
395-5M	395	79
400-5M	400	80
440-5M	440	88
445-5M	445	89
450-5M	450	90
460-5M	460	92
470-5M	470	94
505-5M	505	101
520-5M	520	104
525-5M	525	105
560-5M	560	112
565-5M	565	113
570-5M	570	114
575-5M	575	115
615-5M	615	123
620-5M	620	124
625-5M	625	125
630-5M	630	126
635-5M	635	127
640-5M	640	128
645-5M	645	129
650-5M	650	130
695-5M	695	139
700-5M	700	140
710-5M	710	142

Length Code	Pitch Length (mm)	No. of teeth
715-5M	715	143
725-5M	725	145
740-5M	740	148
790-5M	790	158
800-5M	800	160
810-5M	810	162
825-5M	825	165
830-5M	830	166
835-5M	835	167
850-5M	850	170
860-5M	860	172
870-5M	870	174
960-5M	960	192
975-5M	975	195
980-5M	980	196
1000-5M	1000	200
1025-5M	1025	205
1050-5M	1050	210
1100-5M	1100	220
1225-5M	1225	245
1270-5M	1270	254
1290-5M	1290	258
1350-5M	1350	270
1375-5M	1375	275
1400-5M	1400	280
1420-5M	1420	284
1455-5M	1455	291
1500-5M	1500	300
1945-5M	1945	389
2000-5M	2000	400
2050-5M	2050	410
2160-5M	2160	432
2250-5M	2250	450
2370-5M	2370	474
2460-5M	2460	492
2525-5M	2525	505


Standard widths:
9mm, 15mm, 20mm, 25mm & 30mm
Standards: RMA IP 24

For a complete list of sizes, consult Fenner India Limited.





Timing Belts
Correas planas dentadas
Zahnflachriemen

**Section 8M - Pitch 8mm**

Length Code	Pitch Length (mm)	No. of teeth
288-8M	288	36
384-8M	384	48
400-8M	400	50
408-8M	408	51
416-8M	416	52
512-8M	512	64
520-8M	520	65
536-8M	536	67
560-8M	560	70
568-8M	568	71
640-8M	640	80
656-8M	656	82
680-8M	680	85
688-8M	688	86
696-8M	696	87
712-8M	712	89
720-8M	720	90
728-8M	728	91
760-8M	760	95
776-8M	776	97
800-8M	800	100
816-8M	816	102
824-8M	824	103
840-8M	840	105
856-8M	856	107
864-8M	864	108
872-8M	872	109
880-8M	880	110
896-8M	896	112
920-8M	920	115
928-8M	928	116
944-8M	944	118
952-8M	952	119
1000-8M	1000	125
1016-8M	1016	127
1040-8M	1040	130
1056-8M	1056	132
1080-8M	1080	135
1104-8M	1104	138
1120-8M	1120	140


Length Code	Pitch Length (mm)	No. of teeth
1128-8M	1128	141
1200-8M	1200	150
1216-8M	1216	152
1248-8M	1248	156
1256-8M	1256	157
1264-8M	1264	158
1272-8M	1272	159
1280-8M	1280	160
1304-8M	1304	163
1360-8M	1360	170
1392-8M	1392	174
1400-8M	1400	175
1424-8M	1424	178
1440-8M	1440	180
1456-8M	1456	182
1480-8M	1480	185
1576-8M	1576	197
1600-8M	1600	200
1648-8M	1648	206
1680-8M	1680	210
1696-8M	1696	212
1728-8M	1728	216
1760-8M	1760	220
1800-8M	1800	225
1904-8M	1904	238
1936-8M	1936	242
2000-8M	2000	250
2080-8M	2080	260
2096-8M	2096	262
2104-8M	2104	263
2136-8M	2136	267
2208-8M	2208	276
2240-8M	2240	280
2304-8M	2304	288
2400-8M	2400	300
2504-8M	2504	313
2600-8M	2600	325
2736-8M	2736	342
2800-8M	2800	350
3200-8M	3200	400

Standard widths:
20mm, 30mm, 50mm & 85mm
Standards: RMA IP 24

For a complete list of sizes, consult Fenner India Limited.



Timing Belts
Correas planas dentadas
Zahnflachriemen



Section 14M - Pitch 14mm

Length Code	Pitch Length (mm)	No. of teeth
966-14M	966	69
1120-14M	1120	80
1190-14M	1190	85
1246-14M	1246	89
1260-14M	1260	90
1288-14M	1288	92
1400-14M	1400	100
1470-14M	1470	105
1610-14M	1610	115
1652-14M	1652	118
1750-14M	1750	125
1764-14M	1764	126
1820-14M	1820	130
1890-14M	1890	135
1960-14M	1960	140
2002-14M	2002	143
2100-14M	2100	150
2590-14M	2590	185
2800-14M	2800	200
3108-14M	3108	222
3150-14M	3150	225
3500-14M	3500	250
3850-14M	3850	275
4760-14M	4760	340

Standard widths:
40mm, 55mm, 85mm, 115mm & 170mm
Standards: RMA IP 24

For a complete list of sizes, consult Fenner India Limited.

For sizes in MXL, XXH, 20M, T2.5, T5, T10, T20 & Double sided Timing & HTD Belts, STD Belts and Torque Drive Plus belts, please consult Fenner India Ltd.





PROBLEM	CAUSE	REMEDY
Belt breaking after fitting	Forcing belt over pulley when fitting, damaging cord and cover.	Reduce drive center distance to fit belt.
	Ingress of foreign bodies e.g. a stone, during running.	Fit an effective guard
Cuts and splits in the base of the belt	Outside idler pulley in use.	Replace with inside idler pulley on the slack side of the drive. Increase the size of the existing idler.
	Pulley diameter too small.	Redesign using recommended minimum pulley pitch diameters.
	Ambient temperature too high (above + 70°C/+ 158°F)	Ensure good ventilation and protect the belts from direct heat.
	Ambient temperature too Low (below - 40°C/- 104°C)	Warm area surrounding drive.
	Abnormal belt slip.	Check drive design to ensure correct number of belts, redesign if necessary. Check the drive tension.
	Contamination by oil or Chemicals.	Protect drive from contamination.
Severe belt vibration	Drive has insufficient belts.	Check drive design and modify if necessary.
	Center distance longer than recommended.	Shorten centers. Use an inside idler in the drive slack side.
	High shock loading.	Use an inside idler pulley in the slack side.
	Too low belt tension.	Correct the belt tension.
	Unbalanced pulleys.	Balance pulleys.

PROBLEM	CAUSE	REMEDY
Belts turn over in pulleys	Poor drive alignment.	Realign the pulleys.
	Excessive belt flap.	Use an inside idler in the slack side.
	Low belt tension.	Re-tension.
	Worn out belt.	Replace with the new belt.
Excessive wear on belt flanks	Incorrect pulley groove angle.	Replace with correct pulley groove angle.
	Incorrect pulley section.	Replace with new pulleys.
	Excessive wear in grooves.	Replace with new pulleys.
	Drive misalignment.	Realign.
	Small pulley diameter below recommended minimum.	Redesign using correct pulley diameters.
	Belt catching on protruding parts.	Remove protrusions or move drive away.
Belt swelling or softening	Contamination by oil or other chemicals.	Protect drive from contamination.
Unusual belt stretch	Worn or wrongly machined pulley grooves.	Replace with new pulleys.
	Used belts mixed with new belts on the drive.	Replace with a Completely new set of belts.
	Belts from different manufacturers used on same drive.	For use as matched set, belts must be from one manufacturer.
	Wrong drive design / lesser number of belts / wrong belt section.	Redesign the drive with correct number of belts / section.